



Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life. This lawn lamp series uses LED. High efficiency constant current driver, ensure the light source is maximum used.


FIELDS OF APPLICATION

Office & Education, offices, open-plan offices, conference rooms, conference rooms, reception areas, counters, galleries, hotels, restaurants, living spaces

IEC 62717 LED-modules for general lighting – Performance requirements
IEC 62722-2-1 Particular requirements for LED luminaires

High Lumen Efficacy
Body - Die cast aluminum
Diffuser - Frosted Acrylic
Glowing Wire Test - 850°
Temperature - ta=20 °C ~ ta max=50 °C
Class - III

Model --- **E308**

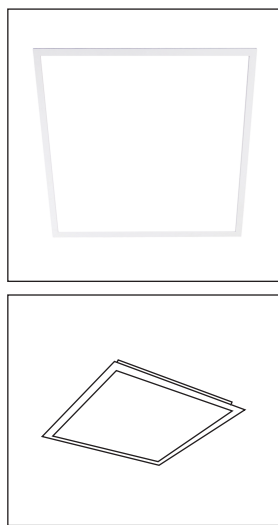

Default Available

30E308-W-30-120-0-A

Product Assistant Chart

E308 X X X X X


Size	A	B	C	D	E	F	[]
Driver	0	1	2	3	4		[]
	On/Off	Dali	Dimmable	Phase Dimming	1-10		
Beam Angle	120°						[]
Kelvin	30	40	60	RGB	RGBW		[]
	3000K	4000K	6000K	RGB	RGBW		
Finishing	W						[]
	White						
Wattage Sizes	30	35	40	45	48	20	[]
	A	B	C	D	E	F	

Lighting Customization Solution offer the wide range of customized product with best available options.


IP 54 IK 06 SMD McA Step 3 220~240V

- A** - 295 X 595 X 10mm
- B** - 295 X 1195 X 10mm
- C** - 595 X 595 X 10mm
- D** - 595 X 595 X 10mm
- E** - 595 X 595 X 10mm
- F** - 1000 X 1000 X 10mm

Accessories

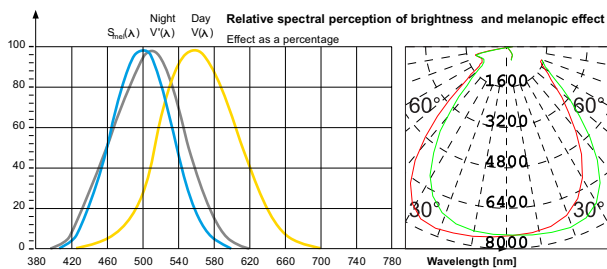

Explanation of the three curves:
V(A) = Perception of brightness, daytime seeing with the cones
V(A) = Night-time seeing with the rods
S_m(A) = Melatonin suppression with the photosensitive ganglion cells



LED life time		Operating time 1.000 h										
Lamp Lumen Maintenance Factor	Lamp Survival Factor	1	10	20	30	40	50	60	70	80	90	100
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99



LED



series wiring



CE

