



Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. The lamp body adopts high-pressure thermo painted aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life. This lawn lamp series uses LED. High efficiency constant current driver, ensure the light source is maximum used.


FIELDS OF APPLICATION

Office & Education, offices, open-plan offices, conference rooms, conference rooms, reception areas, counters, galleries, hotels, restaurants, living spaces

IEC 62717 LED-modules for general lighting – Performance requirements
IEC 62722-2-1 Particular requirements for LED luminaires

High Lumen Efficacy 120lm/W
Body - Die cast aluminum
Diffuser - Polycarbonate PMMA Diffuser
Glowing Wire Test - 850°
Temperature - ta=20 °C ~ ta max=50 °C
Class - III

Model --- **E322**

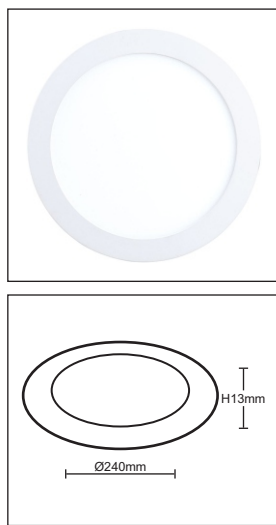

A - Ø240 X 13mm
Cutout - Ø225mm

Default Available




Product Assistant Chart

E322 X X X X X			
Size	A	[]	[]
Driver	0 1 2 3 4	[]	[]
	On/Off Dali Dimmable Phase Dimming 1-10		
Beam Angle	180°	[]	[]
Kelvin	30 40 60	[]	[]
	3000K 4000K 6000K		
Finishing	W	[]	[]
	White		
Wattage Sizes	20	[]	[]


Lighting Customization Solution offer the wide range of customized product with best available options.

IP 54 IK 08 SMD McA Step 3 220~240V

Accessories

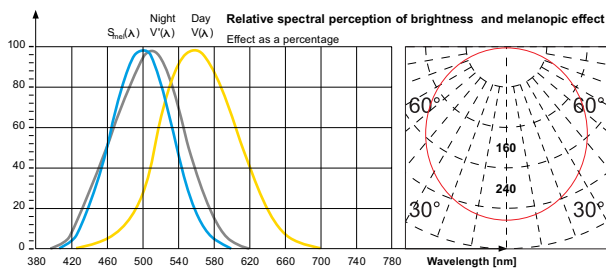

Explanation of the three curves:
V(A) = Perception of brightness, daytime seeing with the cones
V(N) = Night-time seeing with the rods
S_m(A) = Melatonin suppression with the photosensitive ganglion cells



LED life time		Operating time 1.000 h											
Lamp Lumen Maintenance Factor	Lamp Survival Factor	1	10	20	30	40	50	60	70	80	90	100	
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99	0.99

