

Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. The lamp body adopts high-pressure thermo painted aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life. This lawn lamp series uses LED. High efficiency constant current driver, ensure the light source is maximum used.


### FIELDS OF APPLICATION

Office & Education, offices, open-plan offices, conference rooms, conference rooms, reception areas, counters, galleries, hotels, restaurants, living spaces

IEC 62717 LED-modules for general lighting – Performance requirements  
IEC 62722-2-1 Particular requirements for LED luminaires

High Lumen Efficacy 2X85lm/W  
Body - Die cast aluminum  
Diffuser - Polycarbonate PMMA Diffuser  
Glowing Wire Test - 850°  
Temperature - ta=20 °C ~ ta max=50 °C  
Class - III

## Model --- E327



A - Ø270 X 140mm

Cutout - Ø255 X 125mm

Default Available

**2X30E327-W-30-24-0-A**

Product Assistant Chart


**E327 X X X X X**

Size	A				[ ]	
Driver	0	1	2	3	4	[ ]
	On/Off	Dali	Dimmable	Phase Dimming	1-10	
Beam Angle	24°				[ ]	
Kelvin	30		40		60	[ ]
	3000K		4000K		6000K	
Finishing	W				[ ]	
	White					
Wattage Sizes	2X30				[ ]	



Lighting Customization Solution offer the wide range of customized product with best available options.

IP 54    IK 08    COB    McA Step 3    220~240V

### Accessories

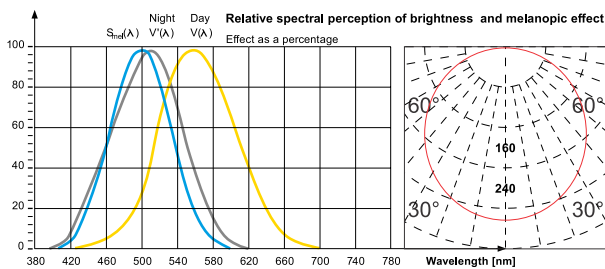

Explanation of the three curves:  
V(A) = Perception of brightness, daytime seeing with the cones  
V(A) = Night-time seeing with the rods  
S<sub>m</sub>(A) = Melatonin suppression with the photosensitive ganglion cells



LED life time		Operating time 1.000 h											
Lamp Lumen Maintenance Factor		1	10	20	30	40	50	60	70	80	90	100	
Lamp Survival Factor		1	1	1	1	1	1	1	1	0.99	0.99	0.99	
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99	0.99



LED

CR>90

series wiring



CE

