





Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life. This lawn lamp series uses LED. High efficiency constant current driver, ensure the light source is maximum used.

FIELDS OF APPLICATION


Office & Education, offices, open-plan offices, conference rooms, conference rooms, reception areas, counters, galleries, hotels, restaurants, living spaces

IEC 62717 LED-modules for general lighting – Performance requirements
IEC 62722-2-1 Particular requirements for LED luminaires

High Lumen Efficacy
Body - Die cast aluminum
Diffuser - PMMA Lens
Glowing Wire Test - 850°
Temperature - ta=20 °C ~ ta max=50 °C
Class - III

Optional optical diffusers -  
Clear Frosted

Model --- **E380**

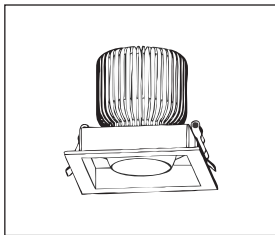

Default Available

11E380-W-30-24-0-A 

Product Assistant Chart

E380 X X X X X

Size	A	B	C	[]		
Driver	0	1	2	3	4	[]
	On/Off	Dali	Dimmable	Phase Dimming	1-10	
Beam Angle	24°	38°	60°	[]	[]	
Kelvin	27	30	40	50	60	[]
	2700K	3000K	4000K	5000K	6000K	
Finishing	W	G	B	[]	[]	
	White	Dark Grey	Black			
Wattage Sizes	11	2 X 11	3 X 11	[]	[]	
	A	B	C			

Lighting Customization Solution offer the wide range of customized product with best available options.

IP 40 IK 08 COB McA Step 3 220~240V


- A** - 115 X 115 X 95mm
Cutout 95 X 95

- B** - 215 X 115 X 95mm
Cutout 190 X 95

- C** - 300 X 115 X 95mm
Cutout 280 X 95

Relative spectral perception of brightness and melanopic effect

Effect as a percentage

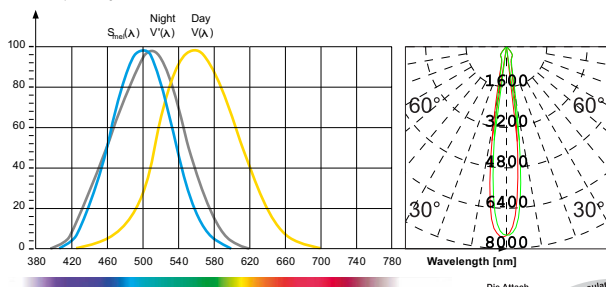

Explanation of the three curves:
V(A) = Perception of brightness, daytime seeing with the cones
V(A) = Night-time seeing with the rods
S_{mel}(A) = Melatonin suppression with the photosensitive ganglion cells



Accessories

LED life time		Operating time 1.000 h										
Lamp Lumen Maintenance Factor		1	10	20	30	40	50	60	70	80	90	100
Lamp Survival Factor		1	1	1	1	1	1	1	1	0.99	0.99	0.99
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99



LED



series wiring



CE

