



Projector Light

GOBO Projector Light


We are delighted to launch our ground-breaking affordable new Gobo Projector version of the F06. Designed to match and be interchangeable with the whole suitable range, the F06 fixture utilises the same rear casting and mounting options as its standard counterpart, maintaining the IP-65 rating and finish options, but we have designed a completely new graceful tapered front end around a new special multi watts LED source and which houses precise lens optics.

High Lumen Efficacy 100lm/W
 Body - Corrosion resistant metal
 Diffuser - Polycarbonate
 Glowing Wire Test - 850°
 Temperature - ta=-20 °C ~ ta max=65 °C

FIELDS OF APPLICATION

Outdoor Gardens, Parks, Pathways, Building Facades, Entertainment Areas

Model --- **F06**

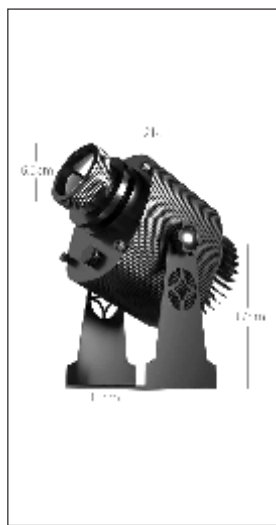

A - 210 X 110 X 170mm

Default Available

15F06-W-30-0-A



Product Assistant Chart

F 06 X X X X X

Size — A —

Driver 0 1 2 3 4
 On/Off Dali Dimmable Phase Dimming 1-10

Beam Angle 10° 30° 45° 60°

Kelvin 27 30 40 60 RGB RGBW SINGLE
 2700K 3000K 4000K 6000K RGB RGBW SINGLE

Finishing B W
 Black White



Wattage 1.5 2.0 3.0 4.0 6.0 8.0

Lighting Customization Solution can offer you modifications for environment with higher options as a customized product.


IP 67 IK 06 LED McA Step 2 / 3 100~240V

Relative spectral perception of brightness and melanopic effect

Effect as a percentage

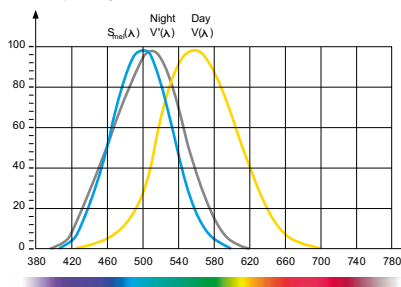

Explanation of the three curves:
 V(A) = Perception of brightness, daytime seeing with the cones
 V(A) = Night-time seeing with the rods
 S_m(A) = Melatonin suppression with the photosensitive ganglion cells



LED life time		Operating time 1.000 h										
Lamp Lumen Maintenance Factor	Lamp Survival Factor	1	10	20	30	40	50	60	70	80	90	100
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99



LED

CR> 90

series wiring



CE

