



mini track light is a versatile adjustable spotlight for Jewelry display cabinet, convention, retail stores, and many more. Great for places that you need bright elegant light to highlight your product.

IEC 62717 LED-modules for general lighting – Performance requirements
IEC 62722-2-1 Particular requirements for LED luminaires

High Lumen Efficacy
Body - Aluminum
Glowing Wire Test - 850°
Temperature - ta=-20 °C ~ ta max=65 °C

Model --- **F 20**



A - 60 X 15mm

Default Available

5x2F20-B-40-40-0-A



Product Assistant Chart

F 20 X X X X X

Size — A —————

Driver 0 1 2 3 4
On/Off Dali Dimmable Phase Dimming 1-10

Beam Angle 40°

Kelvin 27 30 40 60 RGB
2700K 3000K 4000K 6000K RGB

Finishing W G B
White Dark Grey Black



Wattage 5x2ww

Lighting Customization Solution can offer you modifications for environment with higher options as a customized product.


IP 20 IK 09 SMD McA Step 2 / 3 DC 12V

Relative spectral perception of brightness and melanopic effect

Effect as a percentage

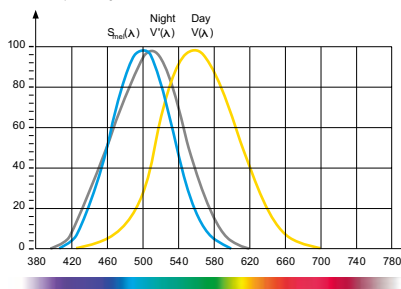

Explanation of the three curves:
V(A) = Perception of brightness, daytime seeing with the cones
V(A) = Night-time seeing with the rods
S_m(A) = Melatonin suppression with the photosensitive ganglion cells



LED life time		Operating time 1.000 h										
Lamp Lumen Maintenance Factor	Lamp Survival Factor	1	10	20	30	40	50	60	70	80	90	100
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99



LED



series wiring



CE

