



Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life. This lawn lamp series uses LED. High efficiency constant current driver, ensure the light source is maximum used.


IEC 62717 LED-modules for general lighting – Performance requirements
IEC 62722-2-1 Particular requirements for LED luminaires

High Lumen Efficacy 300lm/M
Body - 10mm white PCB, Waterproof
Glowing Wire Test - 850°
Temperature - ta=20 °C ~ ta max=50 °C
Class - I

Installations

Surface (floor, wall, ceiling)

Model ----- **K49**



A - 4 X 10 X 1000mm

Default Available

8K49-30-120-A



Product Assistant Chart

K49 X X X X X

Size — A — []

Driver — 0 — []
On/Off 1 — [] 2 — [] 3 — [] 4 — []
 Dali Dimmable Phase Dimming 1-10

Beam Angle — 120° — []

Kelvin — 30 — []
 3000K




Finishing — W — []
 White

Wattage — 8 — []


Lighting Customization Solution can offer you modifications for environment with higher options as a customized product.

IP 65 LED's / M 120 SMD 2835 McA Step 3 DC 24V

Relative spectral perception of brightness and melanopic effect
Effect as a percentage

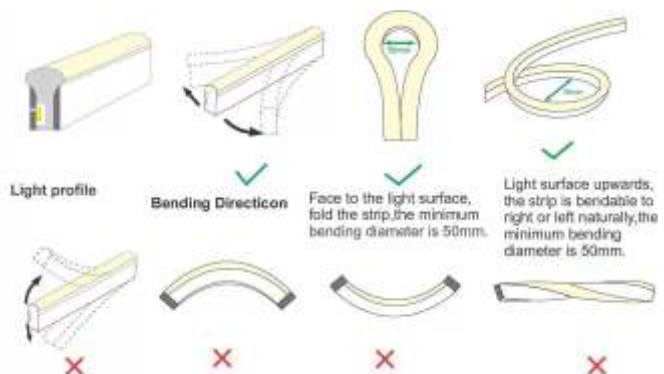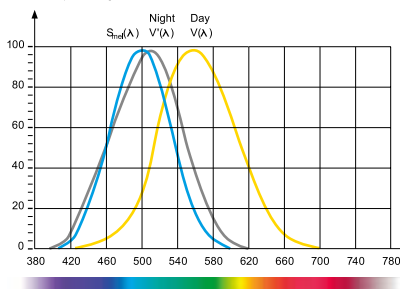

Explanation of the three curves:
V(A) = Perception of brightness, daytime seeing with the cones
V(A) = Night-time seeing with the rods
S_m(A) = Melatonin suppression with the photosensitive ganglion cells



LED life time		Operating time 1.000 h										
Lamp Lumen Maintenance Factor	Lamp Survival Factor	1	10	20	30	40	50	60	70	80	90	100
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99



LED



series wiring



CE

