



Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life. This lawn lamp series uses LED. High efficiency constant current driver, ensure the light source is maximum used.


FIELDS OF APPLICATION

Office & Education, offices, open-plan offices, conference rooms, conference rooms, reception areas, counters, galleries, hotels, restaurants, living spaces

IEC 62717 LED-modules for general lighting – Performance requirements
IEC 62722-2-1 Particular requirements for LED luminaires

High Lumen Efficacy 120lm/W
Body - Die cast extruded aluminum
Diffuser - Polycarbonate cover
Glowing Wire Test - 850°
Temperature - ta=20 °C ~ ta max=50 °C
Class - I

Model ----- **K61**



- A** - 1000 X 28X 35mm
- B** - 500 X 28 X 35mm
- C** - 300 X 28 X 35mm

Default Available

11K61-GR-30-30-0-A

Product Assistant Chart


K61 X X X X X										
Size	A B C			[]						
Driver	0	1	2	3	4	[]				
	On/Off	Dali	Dimmable	Phase Dimming	1-10					
Beam Angle	30°		60°		10x60°					[]
Kelvin	27	30	40	50	60	DMX	RGB	[]		
	2700K	3000K	4000K	5000K	6000K	DMX512	RGB			
Finishing	B	GR	[]							
	Black	Gray								
Wattage	11									[]

Lighting Customization Solution can offer you modifications for environment with higher options as a customized product.

IP 65 IK 09 LED McA Step 3 DC 24V

Relative spectral perception of brightness and melanopic effect

Effect as a percentage

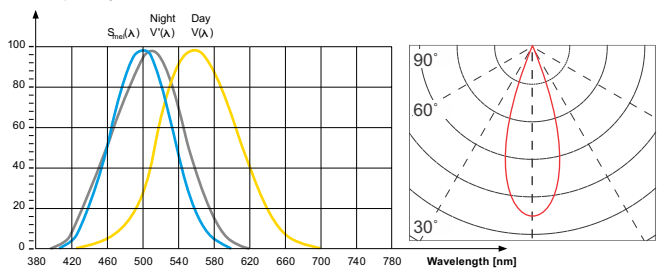

Explanation of the three curves:
V(A) = Perception of brightness, daytime seeing with the cones
V(A) = Night-time seeing with the rods
S_m(A) = Melatonin suppression with the photosensitive ganglion cells



LED life time		Operating time 1.000 h											
Lamp Lumen Maintenance Factor	Lamp Survival Factor	1	10	20	30	40	50	60	70	80	90	100	
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99	0.99



LED

CR>90

series wiring



CE



LM-80



FLICKER FREE