



FIELDS OF APPLICATION

Office & Education, offices, open-plan offices, conference rooms, conference rooms, reception areas, counters, galleries, hotels, restaurants, living spaces

IEC 62717 LED-modules for general lighting – Performance requirements
IEC 62722-2-1 Particular requirements for LED luminaires

- High Lumen Efficacy 100lm/W
- Body - Die cast extruded aluminum
- Diffuser - Polycarbonate cover
- Glowing Wire Test - 850°
- Temperature - ta=20 °C ~ ta max=50 °C
- Class - I

Model ----- **K66**



A - 1200 X 190 X 165H

Default Available

39K66-W-30-120-0-A

Product Assistant Chart

K66 X X X X X


- Size — A — []
- Driver — 0 1 2 3 4 — []
On/Off Dali Dimmable Phase Dimming 1-10
- Beam Angle — 120° — []
- Kelvin — 30 40 60 — []
3000K 4000K 6000K
- Finishing — W — []
White
- Wattage — 39 — []

Lighting Customization Solution can offer you modifications for environment with higher options as a customized product.

IP 20 IK 06 LED McA Step 3 220~240V

Relative spectral perception of brightness and melanopic effect

Effect as a percentage

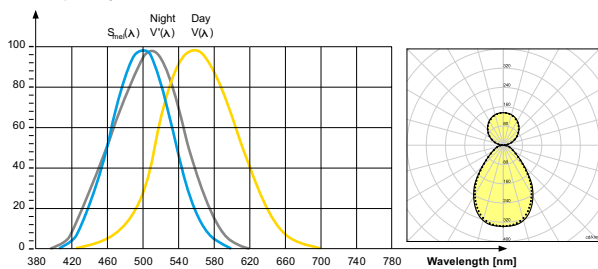

Explanation of the three curves:
V(A) = Perception of brightness, daytime seeing with the cones
V(A) = Night-time seeing with the rods
S_{mel}(A) = Melatonin suppression with the photosensitive ganglion cells



LED life time		Operating time 1.000 h											
Lamp Lumen Maintenance Factor	Lamp Survival Factor	1	10	20	30	40	50	60	70	80	90	100	
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99	0.99

