



Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life. This lawn lamp series uses LED. High efficiency constant current driver, ensure the light source is maximum used.


IEC 62717 LED-modules for general lighting – Performance requirements
IEC 62722-2-1 Particular requirements for LED luminaires

High Lumen Efficacy 130lm/W
Body - Extruded aluminum with polycarbonate diffuser
Glowing Wire Test - 850°
Temperature - ta=20 °C ~ ta max=50 °C
Class - III

FIELDS OF APPLICATION

Office & Education, offices, open-plan offices, conference rooms, conference rooms, reception areas, counters, galleries, hotels, restaurants, living spaces

Model --- **P149**

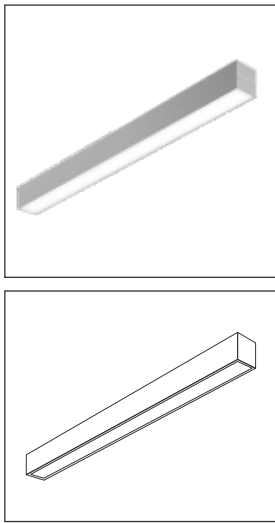

Default Available

35X15P149-ALU-30-120-0-A

Product Assistant Chart

P149 X X X X X

- Size: A
- Driver: 0 (On/Off), 1 (Dali), 2 (Dimmable), 3 (Phase Dimming), 4 (1-10)
- Beam Angle: 120°
- Kelvin: 30 (3000K), 40 (4000K), 60 (6000K)
- Finishing: ALU (ALUMINUM)
- Wattage: DOWN 35 x UP15



A - 1205 X 80 X 70 H

Lighting Customization Solution offer the wide range of customized product with best available options.


IP 44 IK 08 LED McA Step 3 120~277V

Relative spectral perception of brightness and melanopic effect

Effect as a percentage

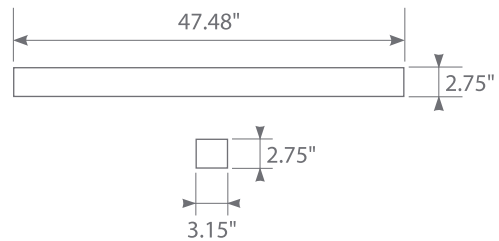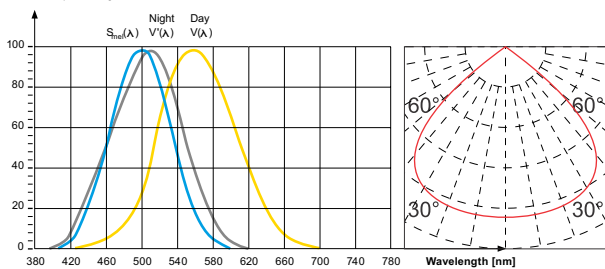

Explanation of the three curves:
V(A) = Perception of brightness, daytime seeing with the cones
V(N) = Night-time seeing with the rods
S_{mel}(λ) = Melatonin suppression with the photosensitive ganglion cells



LED life time		Operating time 1.000 h										
Lamp Lumen Maintenance Factor	Lamp Survival Factor	1	10	20	30	40	50	60	70	80	90	100
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99

