



Industrial luminaries



Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life. This lawn lamp series uses LED. High efficiency constant current driver, ensure the light source is maximum used.

FIELDS OF APPLICATION


Office & Education, offices, open-plan offices, conference rooms, conference rooms, reception areas, counters, galleries, hotels, restaurants, living spaces

IEC 62717 LED-modules for general lighting – Performance requirements
IEC 62722-2-1 Particular requirements for LED luminaires

High Lumen Efficacy 120lm/W
Body - Die cast aluminum
Diffuser - PMMA polycarbonate shock proof
Glowing Wire Test - 850°
Temperature - $t_a=20\text{ }^\circ\text{C} \sim t_a \text{max}=50\text{ }^\circ\text{C}$
Class - III

Optional optical diffusers -  
Clear Frosted

Model --- S03

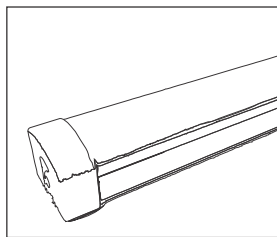

A - 600 X 60 X 73 mm

B - 900 X 60 X 73 mm

C - 1200 X 60 X 73 mm

D - 1500 X 60 X 73 mm

Default Available


20S03-W-30-120-0-A 

Product Assistant Chart



S03		X	X	X	X	X			
Size	A	B	C	D	[]				
Driver	0	1	2	3	4	[]			
	On/Off	Dali	Dimmable	Phase Dimming	1-10				
Beam Angle	120°					[]			
Kelvin	30	40	50	60	[]				
	3000K	4000K	5000K	6000K					
Finishing	W	G	B	[]					
	White	Dark Grey	Black						
Wattage Sizes	20	29	36	47	55	68	[]		
	A	B	C	C	D	D			
Lighting Customization Solution offer the wide range of customized product with best available options.									
		IP 65	IK 09	LED	McA Step 3	220~240V			

Relative spectral perception of brightness and melanopic effect

Effect as a percentage

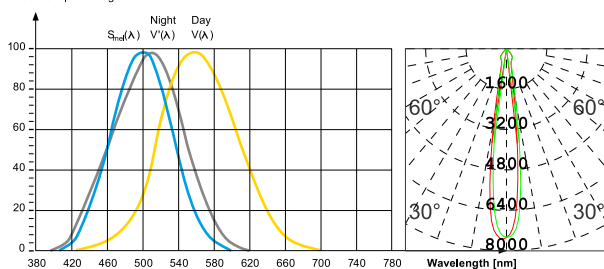

Explanation of the three curves:
V(A) = Perception of brightness, daytime seeing with the cones
V(A) = Night-time seeing with the rods
 $S_m(A)$ = Melatonin suppression with the photosensitive ganglion cells



Accessories

LED life time		Operating time 1.000 h										
Lamp Lumen Maintenance Factor		1	10	20	30	40	50	60	70	80	90	100
Lamp Survival Factor		1	1	1	1	1	1	1	1	0.99	0.99	0.99
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99



LED

CR>90

series wiring



CE

