



Wall luminaires


Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life. This lawn lamp series uses LED. High efficiency constant current driver, ensure the light source is maximum used.

IEC 62717 LED-modules for general lighting – Performance requirements
IEC 62722-2-1 Particular requirements for LED luminaires

High Lumen Efficacy 100lm/W
Body - PMMA Polymethyl methacrylate UV Stabilized
Glowing Wire Test - 850°
Temperature - ta=20 °C ~ ta max=50 °C
Class - II

FIELDS OF APPLICATION
All outdoor wall areas

Model --- **W54**



A - 190 X 130 X 350mm

Default Available

E27W54-W-30-180-0-A

Product Assistant Chart


W54 X X X X X				
Size	A			
Driver	0	1	2	3
	On/Off	Dali	Dimmable	Phase Dimming
Beam Angle	180°			
Kelvin	27	30	40	50
	2700K	3000K	4000K	5000K
Finishing	W	B	AS	AG
	White	Black	Antique Silver	Antique Gold
Wattage Sizes	E27			

Lighting Customization Solution offer the wide range of customized product with best available options.

IP 65 IK 09 LED McA Step 3 220~240V

Relative spectral perception of brightness and melanopic effect

Effect as a percentage

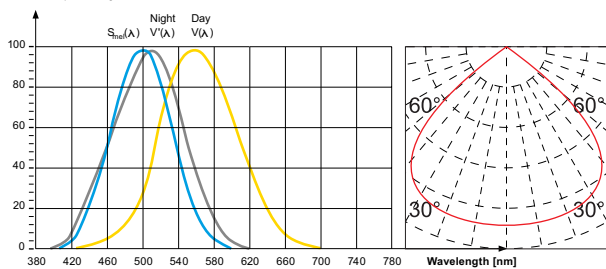

Explanation of the three curves:
V(A) = Perception of brightness, daytime seeing with the cones
V(A) = Night-time seeing with the rods
S_{mel}(A) = Melatonin suppression with the photosensitive ganglion cells



LED life time		Operating time 1.000 h										
Lamp Lumen Maintenance Factor	Lamp Survival Factor	1	10	20	30	40	50	60	70	80	90	100
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99



LED



series wiring



CE

