



## Decorative Light

A small, iconic fixture inspired by the classical silhouette of a grain. This shape was refined during the design phase to finally become – a minimalistic pendant with a distinct industrial character. D31, with its colour range of white, black, yellow and green, can both step forward in a room and become a dynamic element or step back and blend into its surroundings.


### FIELDS OF APPLICATION

Office & Education, offices, open-plan offices, conference rooms, conference rooms, reception areas, counters, galleries, hotels, restaurants, living spaces

IEC 62717 LED-modules for general lighting – Performance requirements  
IEC 62722-2-1 Particular requirements for LED luminaires

High Lumen Efficacy - 85lm/W  
Body - Aluminum  
Diffuser - Acrylic diffuser  
Glowing Wire Test - 850°  
Temperature - ta=20 °C ~ ta max=50 °C  
Class - III

# Model --- D32

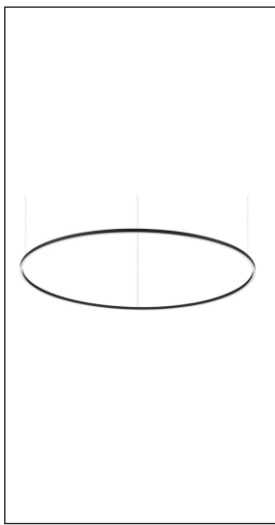

Default Available

**142D32-B-40**



Product Assistant Chart

D32		X	X	X	X	X
Size	A	B	C	D	[ ]	
Driver	0	1	2	3	4	[ ]
	On/Off	Dali	Dimmable	Phase Dimming	1-10	
Beam Angle						[ ]
Kelvin	40	50	60			[ ]
	4000K	5000K	6000K			
Finishing	B					[ ]
	BLACK					
Wattage	142W	173W	211W	474W	[ ]	

A - Ø2000 X 50 X 75Hmm


B - Ø2500 X 50 X 75Hmm

C - Ø3000 X 50 X 75Hmm


D - Ø7000 X 50 X 75Hmm

Lighting Customization Solution offer the wide range of customized product with best available options.

IP 20      LED      220-240V

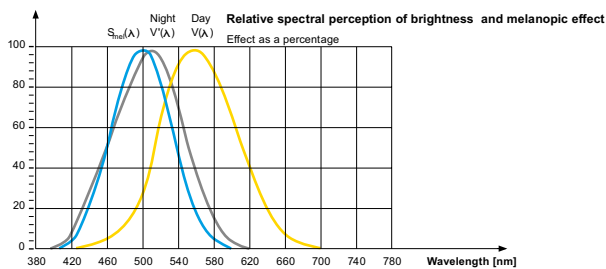

Explanation of the three curves:  
V(A) = Perception of brightness, daytime seeing with the cones  
V(A) = Night-time seeing with the rods  
S<sub>m</sub>(A) = Melatonin suppression with the photosensitive ganglion cells



LED life time		Operating time 1.000 h											
Lamp Lumen Maintenance Factor		1	10	20	30	40	50	60	70	80	90	100	
Lamp Survival Factor		1	1	1	1	1	1	1	1	0.99	0.99	0.99	
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99	0.99



LED

CR>90

series wiring



CE

