



Decorative Light

A small, iconic fixture inspired by the classical silhouette of a grain. This shape was refined during the design phase to finally become – a minimalistic pendant with a distinct industrial character. D31, with its colour range of white, black, yellow and green, can both step forward in a room and become a dynamic element or step back and blend into its surroundings.


FIELDS OF APPLICATION

Office & Education, offices, open-plan offices, conference rooms, conference rooms, reception areas, counters, galleries, hotels, restaurants, living spaces

IEC 62717 LED-modules for general lighting – Performance requirements
IEC 62722-2-1 Particular requirements for LED luminaires

High Lumen Efficacy - 9lm/W
Body - PMMA. Base made up of a transparent polycarbonate casing
Diffuser - PMMA
Glowing Wire Test - 960°
Temperature - ta=20 °C ~ ta max=60 °C
Class - III

Model --- **D34**

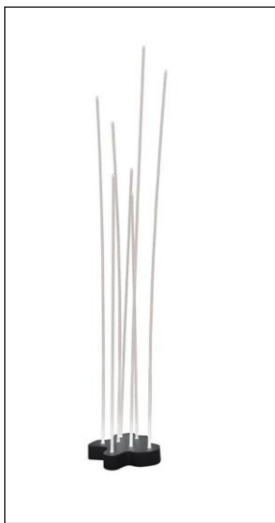


A - W224 X H1499mm

Default Available

9.5D34-B-400-A




Product Assistant Chart


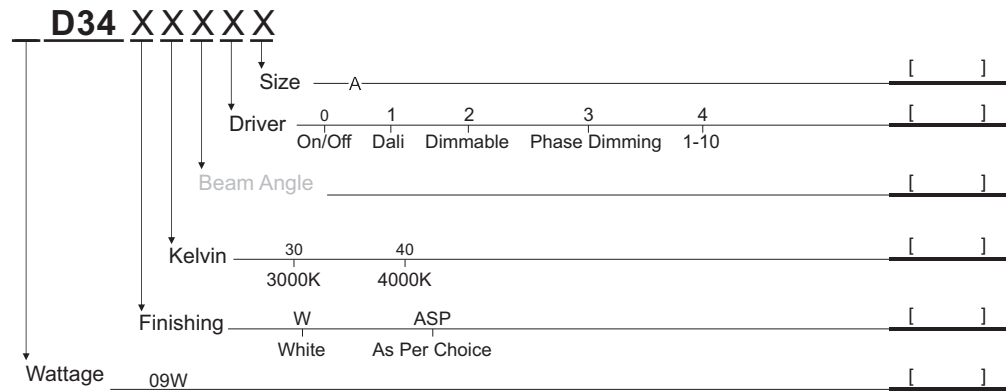


Lighting Customization Solution offer the wide range of customized product with best available options.


IP 67 / 68 IK 10 LED 24V DC AC220~240V / 50-60Hz

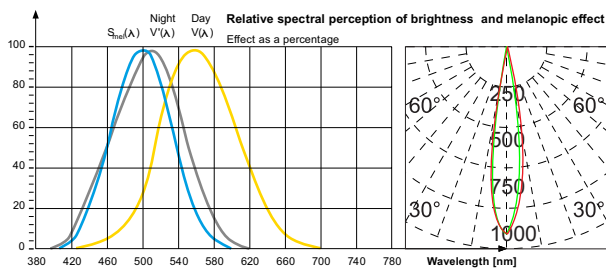

Installation

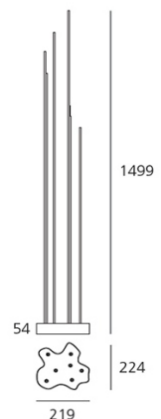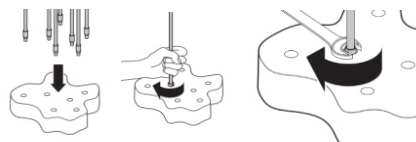

Explanation of the three curves:
V(A) = Perception of brightness, daytime seeing with the cones
V(A) = Night-time seeing with the rods
S_m(A) = Melatonin suppression with the photosensitive ganglion cells



LED life time		Operating time 1.000 h											
Lamp Lumen Maintenance Factor	Lamp Survival Factor	1	10	20	30	40	50	60	70	80	90	100	
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99	0.99



LED



series wiring

