



Inground Light



Inground Light

Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life. This lawn lamp series uses LED. High efficiency constant current driver, ensure the light source is maximum used.

IEC 62717 LED-modules for general lighting – Performance requirements
IEC 62722-2-1 Particular requirements for LED luminaires

High Lumen Efficacy - 120lm/W
Body - Entirely Made of Stainless Steel 316Ti
Diffuser - Toughened Safety Tempered Glass
Glowing Wire Test - 850°
Temperature - ta=20 °C ~ ta max=50 °C
Class - III

FIELDS OF APPLICATION
Outdoor Areas

Model --- L93



A - A500 X B90 X C70mm
B - A1000 X B90 X C70mm

Default Available

1 2 L 9 3 - S S - 3 0 - 1 5 - 0 - A

Product Assistant Chart


L93 X X X X X

Size	A	B	[]				
Driver	0	1	2	3	4	[]	
	On/Off	Dali	Dimmable	Phase Dimming	1-10		
Beam Angle	15°	24°	36°	45°	60°	110°	[]
Kelvin	B	[]					
	BLACK						
Finishing	AISI 316L	[]					
Wattage	12W	18W	24W	36W	40W	50W	[]

Lighting Customization Solution offer the wide range of customized product with best available options.

IP 67 IK 07 LED AC220 ~ 240V / DC24V

Relative spectral perception of brightness and melanopic effect
Effect as a percentage

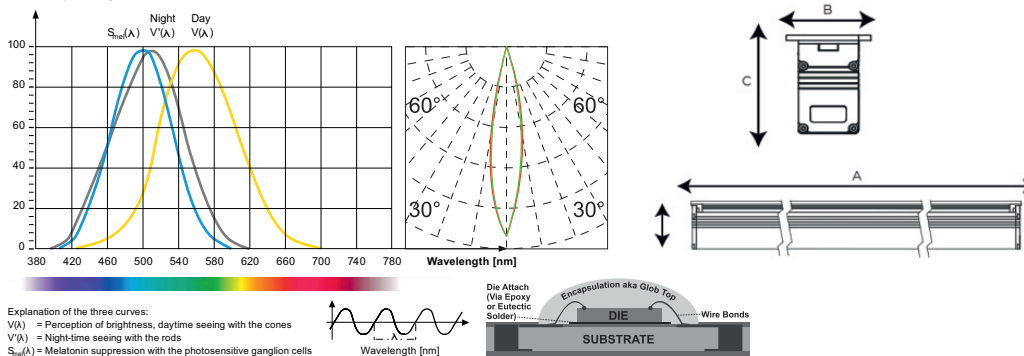

LED life time		Operating time 1.000 h											
Lamp Lumen Maintenance Factor	Lamp Survival Factor	1	10	20	30	40	50	60	70	80	90	100	
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64	
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.98	
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99	0.99



LED



series wiring

