



Solar Wall luminaires

Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life. This lawn lamp series uses LED. High efficiency constant current driver, ensure the light source is maximum used.


**FIELDS OF APPLICATION**

Office & Education, offices, open-plan offices, conference rooms, conference rooms, reception areas, counters, galleries, hotels, restaurants, living spaces

IEC 62717 LED-modules for general lighting – Performance requirements  
IEC 62722-2-1 Particular requirements for LED luminaires

High Lumen Efficacy 190lm/W  
Body - Abs & PC  
Capacity - 3.7V 7.4WH  
Charging Time - 7Hrs  
Glowing Wire Test - 850°  
Temperature - ta=20 °C ~ ta max=60 °C

Model --- **W109**




**A** - 157.78 X 150 X H49.88mm  
Install Height - 2.5~3m

Default Available

**8W109-BK-40-120-0-A**


Product Assistant Chart

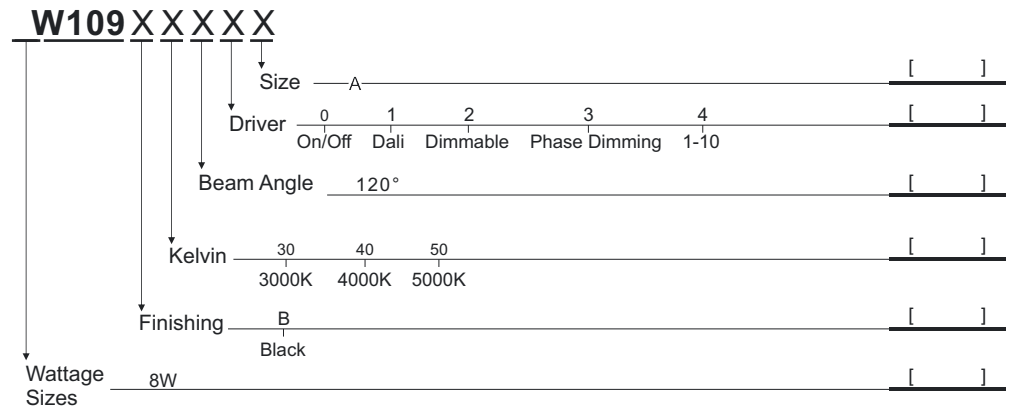



Lighting Customization Solution offer the wide range of customized product with best available options.

IP 65      LED      4.86V      Li-ion Battery

**Relative spectral perception of brightness and melanopic effect**  
Effect as a percentage

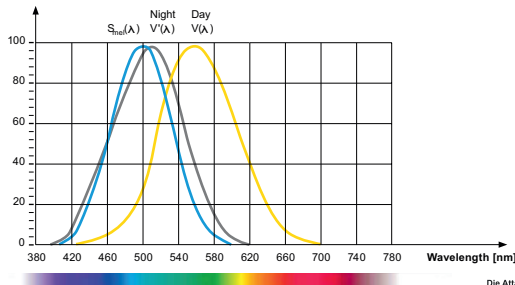

Explanation of the three curves:  
V(A) = Perception of brightness, daytime seeing with the cones  
V(A) = Night-time seeing with the rods  
S\_m(A) = Melatonin suppression with the photosensitive ganglion cells

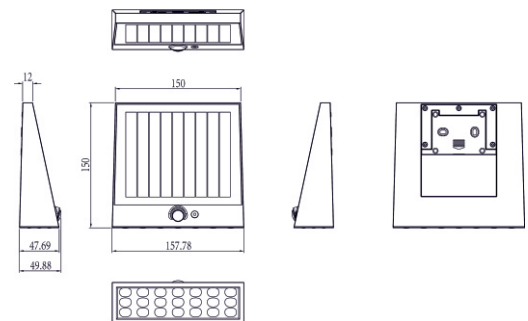

LED life time		Operating time 1.000 h										
Lamp Lumen Maintenance Factor	Lamp Survival Factor	1	10	20	30	40	50	60	70	80	90	100
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99

